


BUNKERING HOSE

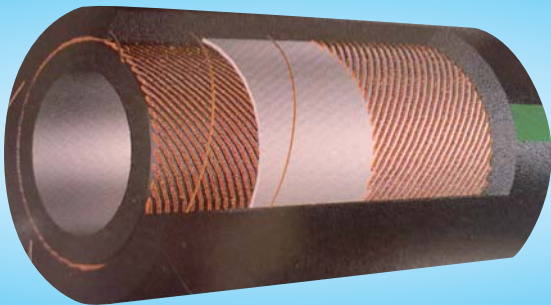

APPLICATION

Specifically fit for the delivery of oil products.

CONSTRUCTION

Tube

Oil and petrol resistant, synthetic nitrile black rubber.

Reinforcement

High tensile synthetic textile and twin conductive copper wire.

Cover

Oil, weather, abrasion, ozone and sea water resistant neoprene rubber.

Aromatics

Resistant to maximum 50% aromatics content.

Smooth wrapped finish.

OPERATING TEMPERATURE

Suitable for use in the range -35°C to 100°C

Code										
	Inside Diameter DN		Outside Diameter DN		Working Pressure		Burst Pressure		Bend Radius	Weight
	mm	inch	mm	inch	bar	psi	bar	psi	mm	Kg/m
33BUNK051063	51	2	63	2" 1/2	10	145	30	435	508	1,430
33BUNK076091	76	3	91	3" 37/64	10	145	30	435	762	2,590
33BUNK102118	102	4	118	4" 41/64	10	145	30	435	1016	3,750
33BUNK152168	152	6	168	6" 5/8	10	145	30	435	1524	5,210
33BUNK203221	203	8	221	8" 45/64	10	145	30	435	2030	7,355
33BUNK254272	254	10	272	10" 23/32	10	145	30	435	2540	9,540