




OIL & PETROLEUM DOCK HOSE



HEAVY DUTY OIL SUCTION & DISCHARGE DOCK HOSE CODE : DH 300

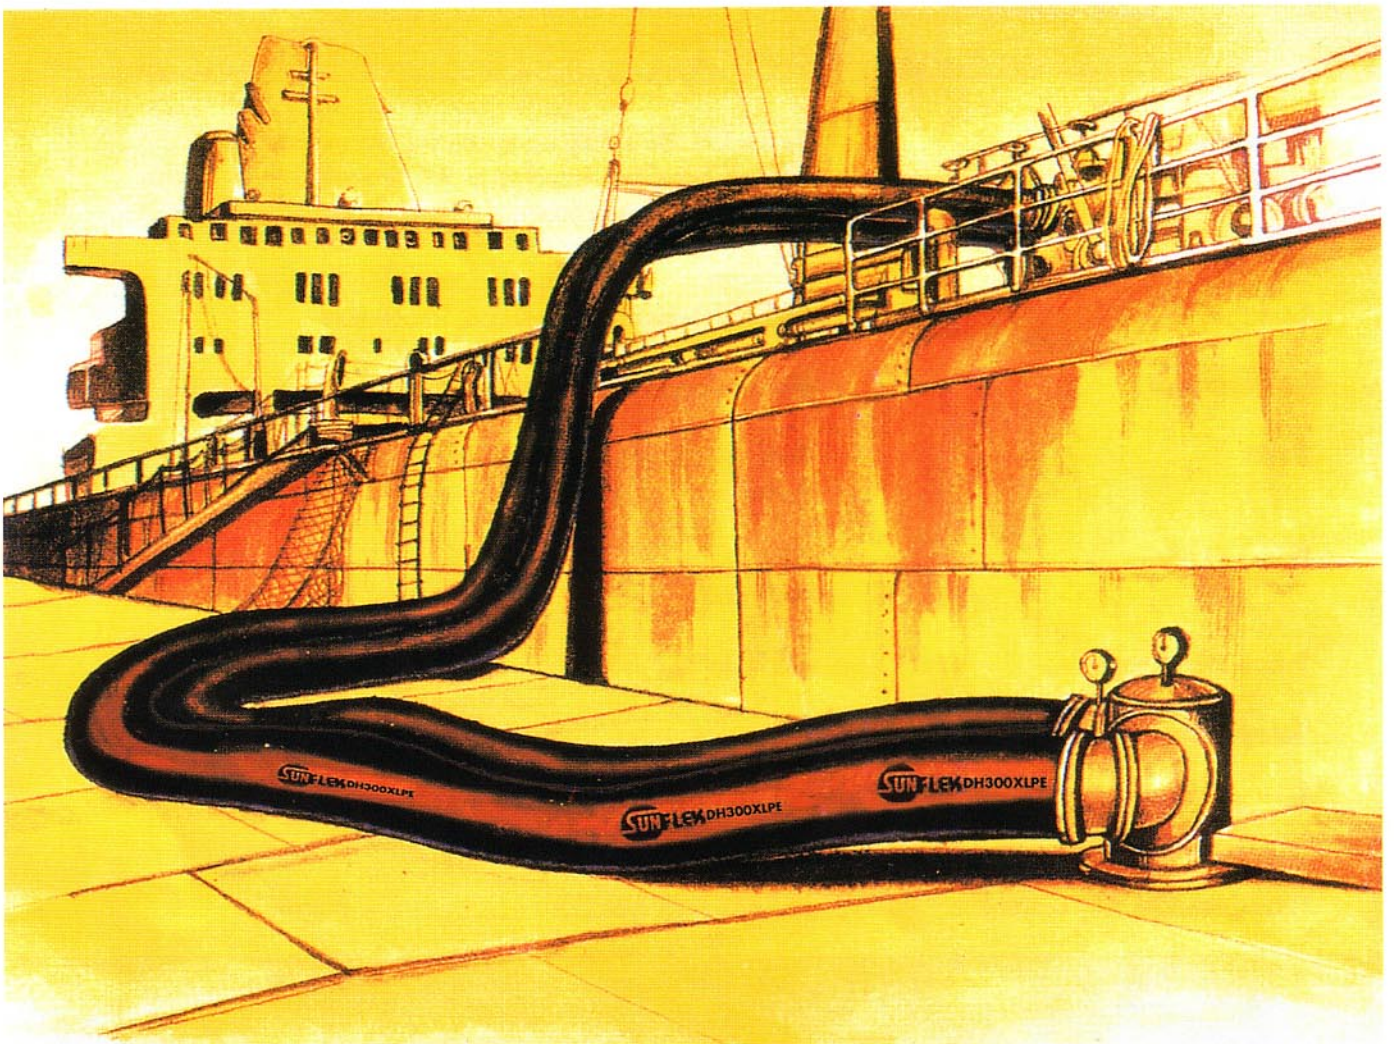

- Typical use** : Sunflex DH 300 is designed for loading and unloading of Petroleum based products of up to 50% Aromatic content. Suitable for bunkering services between docks and ships under all types of service conditions.
- Construction-Tube** : Black, Oil Resistance Nitrile Rubber, Smooth Bore
- Reinforcement** : High tensile synthetic cord incorporating wire helix.
- Cover** : Black, oil, abrasion, ozone and weather resistance Chloroprene Rubber with Orange longitudinal stripe.
- Pressure Rating** : Working Pressure - 300 PSI
Test Pressure - 450 PSI
- Temperature Range** : -40 ° C to 100 ° C
- Safety Factor** : Minimum 4 : 1
- Marking** : SUNFLEX DH 300 SUNFLEX BUNKERING HOSE
WP 300 PSI TP 450 PSI BS 1435-S 15
- Hose assemblies fully conform to** : BS 1435 1987 Type S15

Nominal Bore I.D X O.D(mm)	Bend Radius (mm/mtr)	Hose Weight (kg/mtr)	Swaged Fittings Weight (kg/Hose)
102 X 126	508	7.00	20.4
152 X 182	914	15.7	31.4
203 X 237	1219	21.2	64.0

Lengths: Up to 18.3 meters

Fittings: Internally Swaged-On fittings, can be fitted with fixed or loose flanges to any specification.